



AMERICAN LED WALL PACK LIGHT






PRODUCT PICTURE:



PRODUCT DIMENSION IMAGE (MM):

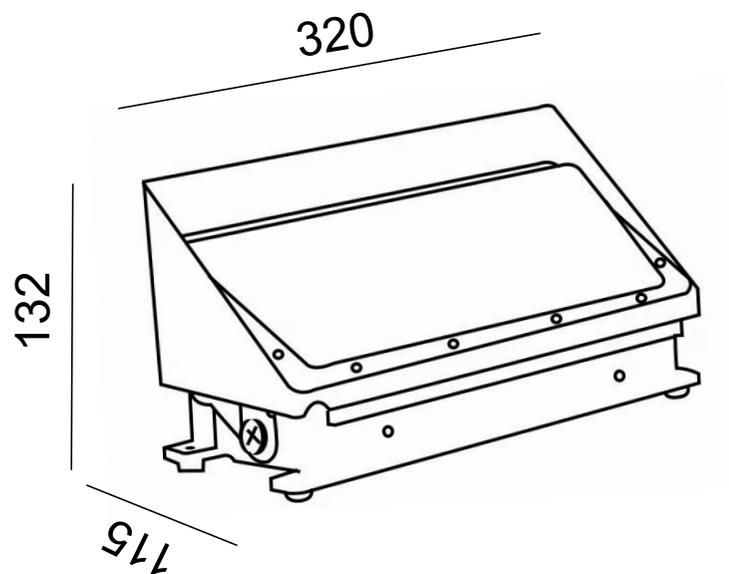



PRODUCT TECHNICAL PARAMETERS

MODEL NO.	CXTGD-50	CXTGD-100	CXTGD-150
LAMP POWER	40W	60W	100W
INPUT VOLTAGE	AC85-277V	AC85-277V	AC85-277V
FREQUENCY RANGE	50-60Hz	50-60Hz	50-60Hz
PF	>0.5	>0.5	>0.5
LEDs	3030	3030	3030
POWER SUPPLY	INTERNAL ISOLATION	INTERNAL ISOLATION	INTERNAL ISOLATION
BEAM ANGLE	120°	120°	120°
CCT	2700-6500K	2700-6500K	2700-6500K
LUMENS	4100lm	6200lm	10500lm
CRI	>70	>70	>70
HOUSING MATERIAL	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM
PRODUCT SIZE (MM)	320*132*H115	320*132*H115	320*132*H115
IP RATING	IP65	IP65	IP65
WORKING TEMPERATURE	-20°+50°	-20°+50°	-20°+50°
WARRANTY	3 YEARS	3 YEARS	3 YEARS



PRODUCT CHARACTERISTIC:

- ◆ LED Wall Packs provide superior lighting without Flickering or Humming
- ◆ Our LED Wall Pack is Eco-Friendly which means there is NO Mercury
- ◆ With this improved lighting, there is no UV or IR in the beam
- ◆ our Wall Packs are easy to install and provide convenient operating features such as our “Instant Start.”
- ◆ Cast aluminum design, better cooling, light quality
- ◆ Optical design, great light utilization and evenness

APPLICATION:

WALL PACK Lighting Series can be widely used in Pedestrian Walkways, Parking Garages, Public Areas, Schools, Hospitals, Hotels and Outdoor Walkways

